

N 814 SERIES VACUUM PUMPS AND COMPRESSORS




N 814 KNE

ADVANTAGES

- High chemical resistance
- Robust design
- Copes well with vapor and condensation

POSSIBLE AREAS OF USE

- Stationary emission measurement technology
- Mobile/portable gas measurement technology
- Instrumental analysis
- Medical technology

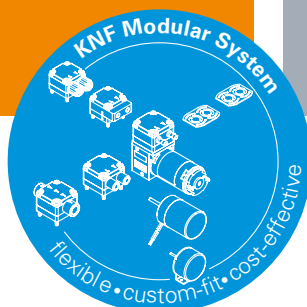

Please visit our website
www.knf.com
to get more information

PERFORMANCE DATA

| Series model | N 814 | | | |
|---|------------|-------------|---------|-------------|
| Material design | KNE | KTE | KNDC | KTDC |
| Pump head | PPS | | | |
| Diaphragm | EPDM | PTFE-coated | EPDM | PTFE-coated |
| Valves | FPM | FFPM | FPM | FFPM |
| Flow rate at atm. pressure (l/min) | 11.5 | | 12.0 | |
| Ultimate vacuum (mbar abs.) | 240 | 290 | 240 | 290 |
| Max. operating pressure (bar rel./psig) | 2.0/29.0 | | | |
| Permissible ambient temperature (°C) | +5 ... +40 | | | |
| Permissible media temperature (°C) | +5 ... +40 | | | |
| Weight (kg/lbs) | 2.4/5.3 | | 1.0/2.2 | |

ELECTRICAL DATA

| | | |
|--------------------------|-------------------|-------------|
| Voltage (V) | 230 | 12 24 |
| Motor | Shaded pole motor | DC motor |
| Protection class motor | IP 00 | IP 50 |
| Frequency (Hz) | 50 | - |
| Power P ₁ (W) | 85.0 | - |
| I _{max} (A) | 0.70 | 2.10 1.10 |
| | | 2.30 1.30 |

ACCESSORIES

| Description | Part No. | Details |
|---------------------------|----------|------------|
| Silencer/Inlet filter | 000346 | G 1/8 |
| Hose connector (straight) | 000360 | G 1/8 PA |
| Hose connector | 014052 | G 1/8 PVDF |

SPARE PARTS

| Description | Part No. | Details |
|--------------------------|----------|---------|
| Intermediate plate | 043259 | |
| Head plate | 029148 | |
| Valve plate/sealing KN_ | 113949 | |
| Valve plate/sealing KT_ | 113950 | |
| Structured diaphragm KN_ | 043262 | |
| Structured diaphragm KT_ | 043261 | |

The performance values for the series models shown on this data sheet were determined under test conditions. The actual performance values may differ and depend in particular on the usage conditions and therefore on the specific application, on the parameters of the components involved in the user's system and on any technical modifications carried out which deviate from the standard configuration or the as delivered condition.

If individual designs have been created for specific customers on the basis of series models, other technical performance data may apply.

Before operation begins, the relevant operating instructions and/or assembly or installation instructions should be read and the safety information contained in these instructions should be noted.

KNF reserves the right to make changes to the product and the associated documentation without prior notice to the customer.



www.knf.com


N 814 KNE | KTE

PERFORMANCE DATA

| Series model | Flow rate at atm. pressure (l/min) ¹⁾ | Max. operating pressure (bar rel./psig) | Ultimate vacuum (mbar abs.) |
|--------------|--|---|-----------------------------|
| N 814 KNE | 11.5 | 2.0/29.0 | 240 |
| N 814 KTE | 11.5 | 2.0/29.0 | 290 |


¹⁾ Liter at STP

N 814 K_E

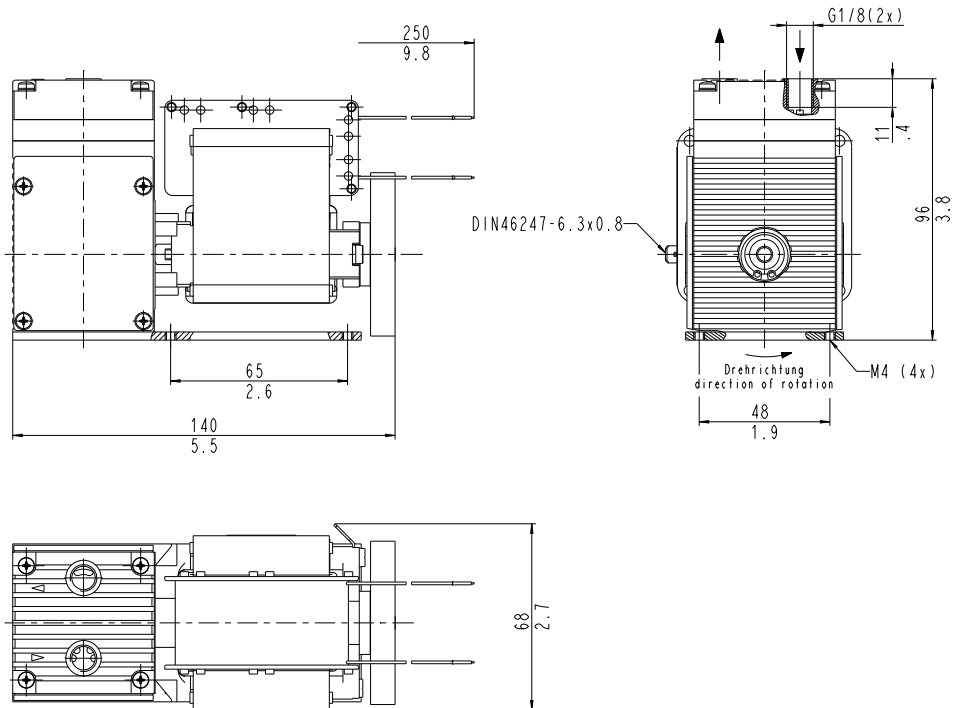


mm
in


N 814 KNE

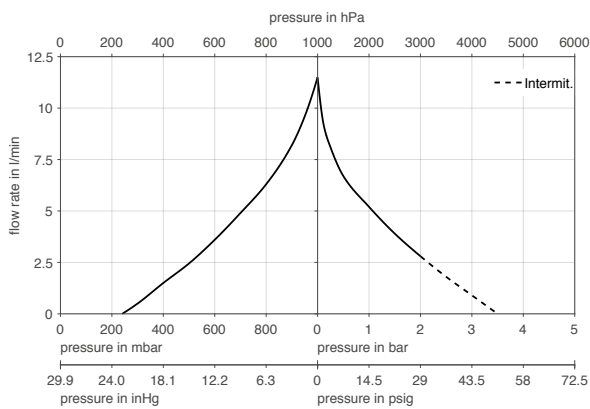

N 814 KTE

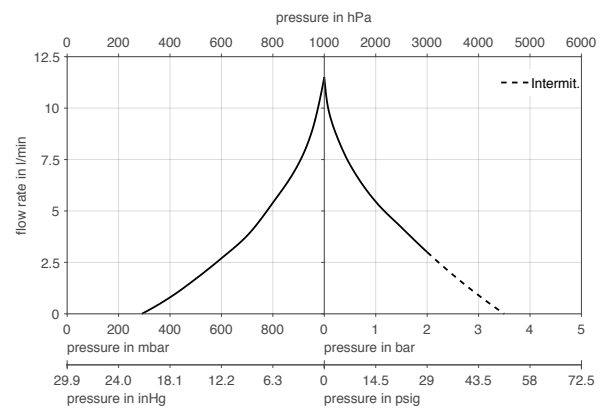

N 814 KNE | PUMP DOWN TIME FOR 5 LITER VESSEL

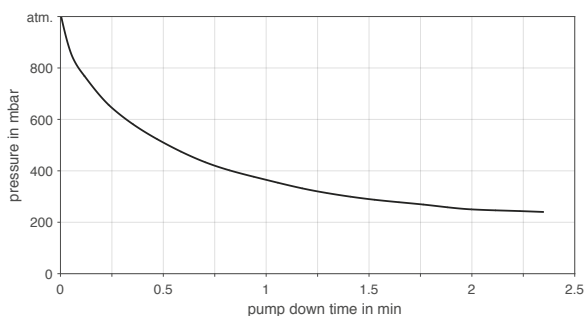





N 814 KNDC | KTDC

PERFORMANCE DATA


| Series model | Flow rate at atm. pressure (l/min) ¹⁾ | Max. operating pressure (bar rel./psig) | Ultimate vacuum (mbar abs.) |
|--------------|--|---|-----------------------------|
| N 814 KNDC | 12.0 | 2.0/29.0 | 240 |
| N 814 KTDC | 12.0 | 2.0/29.0 | 290 |

¹⁾ Liter at STP

N 814 K_DC

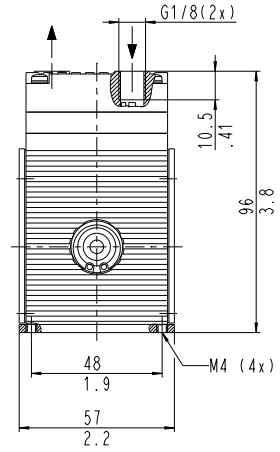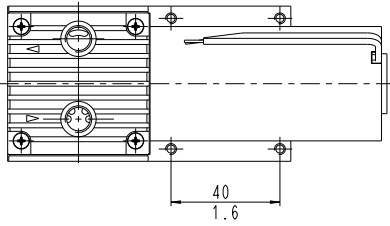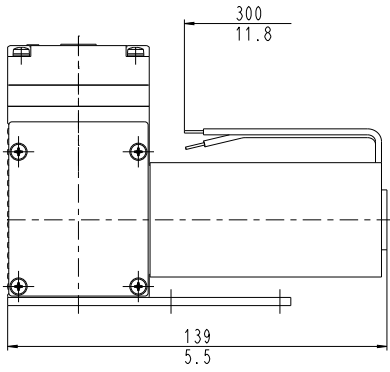

N 814 KNDC

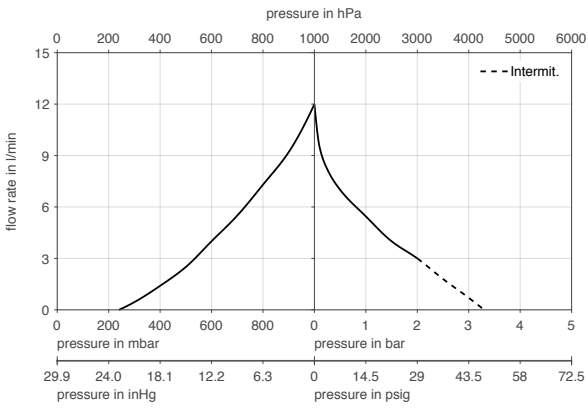

N 814 KTDC

